


Installation


1. Place the siren in the desired location.
2. Remove the back cover and fix it to the wall using the screws and rawplugs supplied **A**.
3. The siren body can then be snapped into place on to the back cover and secured using the screw at the base.



* Please note that this siren can also be used free standing.

Connection to the alarm unit


1. Remove the screw at the base of the alarm unit.
2. Remove the back plate and connect the mini jack plug at the end of the siren cable into the alarm unit socket **B**.

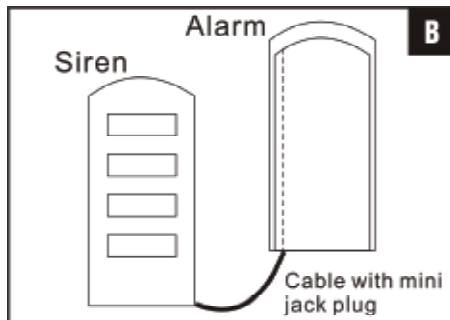

NOTE: Please connect the Remote siren unit to the main alarm unit before fitting batteries, as the siren will sound until it is connected.

Battery installation

1. The battery compartment is accessed from the rear of the alarm unit by removing the screw from the base and lifting the back cover **C**.
2. Insert four (4) 'AA' size batteries (not included) following the polarity **D**. When the last battery is inserted the siren will beep very loudly to indicate that the batteries are installed properly.
3. Replace the back cover and fix with screw.



The Battery Low LED will light when the batteries need replacing.

Operation

Once the alarm has been activated by motion the siren will sound, so increasing the effectiveness of the alarm. If the cable connecting the siren and the alarm is disconnected or cut, the siren will sound instantly, until it is re-connected or the batteries removed.

Care and maintenance

To clean the case, simply use a soft slightly damp cloth with water and wipe dry immediately.

CAUTION: Never use chemicals to clean the case, as they may cause damage to the plastic and cause the alarm not to function.

Battery precautions

When using this product follow these precautions at all times.

- Use only the appropriate size batteries
- Be sure to follow the correct polarity when installing the batteries as indicated in the battery compartment. Incorrect polarity may cause damage to the alarm.
- Do not mix different types of battery such as Alkaline and Carbon-zinc or old batteries with new.
- If the alarm is not used for long periods of time, remove the batteries to prevent damage or injury from possible battery leakage.
- Do not recharge batteries not intended to be recharged as they can overheat and rupture. (Always follow the manufacturer's directions.)